

(19)



Europäisches Patentamt

European Patent Office

Office européen des brevets



(11)

EP 0 981 156 A2

(12)

EUROPEAN PATENT APPLICATION

(43) Date of publication:
23.02.2000 Bulletin 2000/08

(51) Int Cl.7: **H01L 21/302, C09J 7/02,
H01L 21/304, H01L 21/58,
B24B 7/22**

(21) Application number: **99306494.8**

(22) Date of filing: **17.08.1999**

(84) Designated Contracting States:
**AT BE CH CY DE DK ES FI FR GB GR IE IT LI LU
MC NL PT SE**
Designated Extension States:
AL LT LV MK RO SI

(30) Priority: **18.08.1998 JP 23160298**

(71) Applicants:
• **Lintec Corporation**
Tokyo 173-0001 (JP)
• **KABUSHIKI KAISHA TOSHIBA**
Kawasaki-shi, Kanagawa-ken 210-8572 (JP)

(72) Inventors:
• **Takahashi, Kazuhiro**
Kawaguchi-shi, Saitama 338-0866 (JP)
• **Ebe, Kazuyoshi**
Minamisaitama-gun, Saitama 349-0223 (JP)
• **Takyu, Shinya**
Kitakatsushika-gun, Saitama 345-0045 (JP)

(74) Representative: **Skailes, Humphrey John**
Frank B. Dehn & Co.,
European Patent Attorneys,
179 Queen Victoria Street
London EC4V 4EL (GB)

(54) **Surface protective pressure-sensitive adhesive sheet for use in semiconductor wafer back grinding and method of use thereof**

(57) A surface protective sheet for semiconductor wafer, used in wafer back grinding during a process comprising forming grooves on the surface of semiconductor wafer furnished with circuit so that the cutting depth of the grooves be smaller than the thickness of the wafer and grinding the back of the wafer so that the thickness of the wafer is reduced and that the wafer is

finally divided into individual chips, the above surface protective sheet comprising a substrate and, superimposed thereon, a pressure sensitive adhesive layer having an elastic modulus of at least 1.0×10^5 Pa at 40°C. This surface protective sheet is applicable to a process which enables producing extremely thin IC chips with high yield.

EP 0 981 156 A2

Description

FIELD OF THE INVENTION

- 5 [0001] The present invention relates to a pressure sensitive adhesive sheet employed for protecting circuit surfaces at the time of wafer back grinding. More particularly, the present invention relates to a pressure sensitive adhesive sheet employed in a wafer working process in which a wafer back is ground to thereby reduce the thickness of the wafer and finally effect the division thereof into individual chips.

10 BACKGROUND OF THE INVENTION

[0002] In recent years, the spread of IC cards has been promoted, and further reduction of the thickness thereof is now demanded. Accordingly, it is required that the thickness of semiconductor chips, which has been about 350 μm , be reduced to 50 - 100 μm or less.

- 15 [0003] It is common practice to grind a wafer back after the formation of circuit patterns. When it is intended to grind a wafer to a thickness of, for example, 100 μm or less, the strength of the wafer is decreased with the result that the wafer tends to be broken. In particular, the wafer is brittle, so that, when there is even a slight defect in the wafer, it may occur that cracking is caused by the defect and the crack grows large through the wafer to thereby extremely lower the chip yield.

- 20 [0004] Japanese Patent Laid-open Publication No. 5(1993)-335411 discloses a process for producing semiconductor chips, in which, for preventing the breakage of wafer attributed to the above growth of cracks, grooves of given depth are formed from the wafer surface and thereafter the wafer back is ground.

[0005] In this chip producing process, the growth of cracks in the wafer from defects as starting points can be stopped by the grooves.

- 25 [0006] However, chip breakage has been occurred in this method as well. Just before the division of the wafer into individual chips, the chips are in the state of being tied with each other by means of extremely thin bridges. Referring to Fig. 6, the chip brought into contact with a spindle of a back grinder and being currently ground differs from the neighboring chip not brought into contact with the spindle regarding the direction of application of grinding force and the magnitude of applied grinding force. This force difference causes chip dislocation and cracks the above thin bridges to thereby result in chip breakage.

30 [0007] Especially, in the use of conventional widely employed surface protective sheets, the degree of chip dislocation is large and chip breakage is likely to occur because the pressure sensitive adhesive of the surface protective sheets is relatively soft.

35 OBJECT OF THE INVENTION

[0008] The present invention has been made taking the above prior art into account. The object of the present invention is to provide a surface protective sheet which is applicable to a process enabling production of extremely thin IC chips with high yield.

40

SUMMARY OF THE INVENTION

- 45 [0009] In one aspect of the present invention, there is provided a surface protective sheet for semiconductor wafer, used in wafer back grinding during a process comprising forming grooves on the surface of semiconductor wafer furnished with circuit so that the cutting depth of the grooves is smaller than the thickness of the wafer and grinding the back of the wafer so that the thickness of the wafer is reduced and that the wafer is finally divided into individual chips,

the above surface protective sheet comprising a substrate and, superimposed thereon, a pressure sensitive adhesive layer having an elastic modulus of at least 1.0×10^5 Pa at 40°C.

- 50 [0010] It is preferred that the pressure sensitive adhesive layer is composed of an energy radiation curable pressure sensitive adhesive. Further, it is preferred that the pressure sensitive adhesive layer have a shear peel strength of at least 10 kg/cm².

[0011] Still further, in the present invention, it is preferred that the surface protective sheet have a compressive strain of 0.1 to 5.0 % at 40 kg/cm².

- 55 [0012] The use of the surface protective sheet of the present invention enables producing extremely thin IC chips with high yield.

[0013] In another aspect of the present invention, there is provided a method of grinding a wafer back, comprising the steps of:

forming grooves on the surface of semiconductor wafer furnished with circuit so that the cutting depth of the grooves is smaller than the thickness of the wafer, sticking the above surface protective sheet to the wafer surface furnished with semiconductor circuits, and grinding the back of the wafer so that the thickness of the wafer is reduced and that the wafer is finally divided into individual chips.

BRIEF DESCRIPTION OF THE DRAWING

[0014]

Fig. 1 is a sectional view of the surface protective sheet of the present invention; Figs. 2 - 5 show process steps for producing thin IC chips with the use of the surface protective sheet (pressure sensitive adhesive sheet) of the present invention; and Fig. 6 shows the mechanism of chip breakage occurred in the conventional back grinding method.

DETAILED DESCRIPTION OF THE INVENTION

[0015] The present invention will now be described in detail with reference to the appended drawings.

[0016] Referring to Fig. 1, the surface protective sheet 10 of the present invention comprises substrate 1 and, superimposed thereon, pressure sensitive adhesive layer 2.

[0017] The substrate 1 is not particularly limited, and various thin-layer products can be used. For example, paper, metal foils and synthetic resin films can be used as the substrate 1. In particular, in the present invention, the use of synthetic resin films is preferred from the viewpoint of water resistance, heat resistance, etc. Examples of the synthetic resin films include films of polyolefins such as polyethylene, polypropylene, polybutene and polymethylpentene; and films of other polymers such as polyvinyl chloride, polyvinylidene chloride, polyethylene terephthalate, polyethylene naphthalate, polybutylene terephthalate, polybutadiene, polyurethanes, ethylene/vinyl acetate copolymers, ethylene/(meth)acrylic acid copolymers, ethylene/(meth)acrylic ester copolymers, ionomers, polystyrene and polyamides.

[0018] Substrates having a thickness and Young's modulus whose product is in the range of 1.0 to 1000 kg/cm, especially 3.0 to 500 kg/cm, are preferably used as the substrate 1.

[0019] The thickness of the above substrate 1 is generally in the range of 5 to 300 μm , preferably 10 to 200 μm . The substrate 1 may be composed of either a single layer of any of the above various films or a laminate thereof.

[0020] With respect to the film laminate, the films may be either directly laminated onto each other by, for example, dry lamination or laminated through the medium of, for example, an adhesive.

[0021] Upper surface, namely the surface of the pressure sensitive adhesive layer 2 furnished side, of the substrate 1 may be treated by corona or may be furnished with another layer such as a primer in order to increase the adherence to the pressure sensitive adhesive.

[0022] When the pressure sensitive adhesive layer 2 described below is composed of an energy radiation curable pressure sensitive adhesive, the pressure sensitive adhesive layer 2 may be irradiated with energy radiation. In this case, the film constituting the substrate 1 must be transparent.

[0023] In the surface protective sheet 10 of the present invention, pressure sensitive adhesive layer 2 is superimposed on the above substrate 1.

[0024] The pressure sensitive adhesive layer 2 is composed of a pressure sensitive adhesive having an elastic modulus of at least 1.0×10^5 Pa, preferably 1.0×10^5 Pa to 1.0×10^{10} Pa, at 40°C. During the grinding of the back of the semiconductor wafer, the surface protective sheet 10 engages in not only surface protection but also wafer fixing. During the back grinding, grinding heat is generated and the heat is conducted to the surface protective sheet 10 with the result that the temperature of the pressure sensitive adhesive layer 2 becomes about 20 to 60°C. Common pressure sensitive adhesives are readily softened by heating, so that their softness is increased in accordance with the advance of the grinding to thereby cause the move of the wafer (chips). However, in the present invention, use is made of the pressure sensitive adhesive having an elastic modulus of at least 1.0×10^5 Pa at 40°C, so that the behavior as illustrated in Fig. 6 can be inhibited to thereby enable preventing chip breakage. Pressure sensitive adhesives whose elastic modulus exceeds 1.0×10^{10} Pa at 40°C can also prevent chip breakage. However, the use thereof is liable to make it difficult to maintain other pressure sensitive adhesive performance.

[0025] The above elastic modulus means the elastic modulus measured when the back of the wafer is being ground while holding the wafer. For example, when a pressure sensitive adhesive whose elastic modulus is changeable by irradiation with energy radiation, such as an energy radiation curable pressure sensitive adhesive is used, grinding of the wafer back may be performed after sticking the pressure sensitive adhesive layer 2 to the wafer and curing the pressure sensitive adhesive layer 2 by energy radiation irradiation. In this case, the above elastic modulus means the elastic modulus measured when the back of the wafer is being ground while holding the wafer, that is, the elastic

modulus of the pressure sensitive adhesive layer having been cured by energy radiation irradiation.

[0026] The elastic modulus can be measured by the torsional shear method (elastic modulus G') or the tension and compression method (elastic modulus E'). The elastic modulus of the energy radiation curable pressure sensitive adhesive prior to energy radiation irradiation is measured by the torsional shear method, and that after energy radiation irradiation is measured by the tension and compression method. The elastic modulus G' and the elastic modulus E' in linear regions generally satisfy the relationship $E' = 3G'$. The above elastic modulus defining the present invention means that measured by the tension and compression method. When measurement is made by the torsional shear method, conversion is effected by the use of the formula $E' = 3G'$.

[0027] The pressure sensitive adhesive for use in the present invention is not limited as long as the above elastic modulus is exhibited. For example, use can be made of rubber, acrylic, silicone and polyvinyl ether based pressure sensitive adhesives. In the present invention, the use of energy radiation curable pressure sensitive adhesives is preferred. Further, use can be made of energy radiation curable and heat foamable pressure sensitive adhesives.

[0028] Although depending on the type of the material thereof, the thickness of the pressure sensitive adhesive layer 2 is generally in the range of about 3 to 100 μm , preferably about 10 to 50 μm .

[0029] Various pressure sensitive adhesives can be used as the above pressure sensitive adhesive. In the present invention, the use of energy radiation curable pressure sensitive adhesive is preferred. For example, those listed in Japanese Patent Publication No. 1(1989)-56112 and Japanese Patent Laid-open Publication No. 7(1995)-135189 are preferably used as the energy radiation curable (photocurable, ultraviolet curable or electron beam curable) pressure sensitive adhesive, which in no way limit the scope of energy radiation curable pressure sensitive adhesives useful in the present invention.

[0030] For example, low-molecular-weight compounds having in the molecule thereof at least two photopolymerizable carbon to carbon double bonds that can be converted into a three-dimensional network structure by light irradiation as disclosed in Japanese Patent Laid-open Publication Nos. 60(1985)-196,956 and 60(1985)-223,139 are widely used as the energy radiation polymerizable compounds to be incorporated in the energy radiation curable pressure sensitive adhesives. Specific examples thereof include trimethylolpropane triacrylate, pentaerythritol triacrylate, pentaerythritol tetraacrylate, dipentaerythritol monohydroxypentaacrylate, dipentaerythritol hexaacrylate, 1,4-butylene glycol diacrylate, 1,6-hexanediol diacrylate, polyethylene glycol diacrylate and commercially available oligoester acrylate.

[0031] Furthermore, besides the above acrylate compounds, urethane acrylate oligomers can be used as the energy radiation polymerizable compounds. Urethane acrylate oligomers can be obtained by reacting an isocyanate-terminated urethane prepolymer which is obtained by reacting a polyol compound such as a polyester or polyether compound with a polyisocyanate compound such as 2,4-tolylene diisocyanate, 2,6-tolylene diisocyanate, 1,3-xylylene diisocyanate, 1,4-xylylene diisocyanate or diphenylmethane-4,4'-diisocyanate with a hydroxyl containing acrylate or methacrylate, such as, 2-hydroxyethyl acrylate, 2-hydroxyethyl methacrylate, 2-hydroxypropyl acrylate, 2-hydroxypropyl methacrylate, polyethylene glycol acrylate or polyethylene glycol methacrylate.

[0032] With respect to the blending ratio of energy radiation polymerizable compound to acrylic pressure sensitive adhesive in the energy radiation curable pressure sensitive adhesive, it is preferred that 50 to 200 parts by weight, especially 50 to 150 parts by weight, and still especially 70 to 120 parts by weight, of the energy radiation polymerizable compound is used per 100 parts by weight of the acrylic pressure sensitive adhesive. In this instance, the initial adhesive strength of the obtained pressure sensitive adhesive sheet is large, and the adhesive strength is sharply dropped upon irradiation of the pressure sensitive adhesive layer with energy radiation. Accordingly, the peeling at the interface of the chips and the acrylic energy radiation curable pressure sensitive adhesive layer is performed to thereby enable picking up of the chips.

[0033] The acrylic energy radiation curable pressure sensitive adhesive layer may be composed of an energy radiation curable copolymer having an energy radiation polymerizable group as a side chain. This energy radiation curable copolymer simultaneously exhibits satisfactory adherence and energy radiation curability properties. Details of the energy radiation curable copolymer having an energy radiation polymerizable group as a side chain are described in, for example, Japanese Patent Laid-open Publication Nos. 5(1993)-32,946 and 8(1996)-27,239. This pressure sensitive adhesive enables omitting the incorporation of low-molecular-weight substances which lower the elastic modulus to thereby ease attaining of a high elastic modulus.

[0034] The above acrylic energy radiation curable pressure sensitive adhesive possesses satisfactory adhesive strength to adherends before irradiation with energy radiation, and the adhesive strength is extremely decreased upon irradiation with energy radiation. That is, the chips can be held by satisfactory adhesive strength before irradiation with energy radiation, but, after irradiation with energy radiation, the chips can be easily peeled.

[0035] The shear peel strength of the above pressure sensitive adhesive layer 2 is preferably at least 10 kg/cm^2 , still preferably in the range of 10 to 100 kg/cm^2 , and yet still preferably in the range of 10 to 50 kg/cm^2 . With respect to the energy radiation curable pressure sensitive adhesive, this shear peel strength also varies depending on whether or not the irradiation with energy radiation has been effected. In the present invention, like the aforementioned elastic modulus, the shear peel strength means that measured when the back of the wafer is being-ground while holding the

wafer. The adhesive strength of the energy radiation curable pressure sensitive adhesive is extremely decreased upon irradiation with energy radiation, so that peeling is likely to occur during the grinding step. However, if the stress in the direction of shear (shear peel strength) is large, the peeling during the grinding step is inhibited irrespective of the 180° peel strength. Therefore, when the shear peel strength is within the above ranges, the wafer (chips) are firmly held during the back grinding to thereby enable preventing chip breakage.

[0036] The compressive strain of the surface protective sheet of the present invention is preferably in the range of 0.1 to 5.0%, still preferably 0.5 to 4.5%.

[0037] The compressive strain of the sheet is measured under a load of 40 kg/cm² in accordance with Japanese Industrial Standard (JIS) K 7208.

[0038] When the compressive strain of the sheet falls within the above ranges, the height difference between the chip brought into contact with a spindle and being currently ground and the neighboring chip not brought into contact with the spindle becomes relatively small to thereby enable preventing chip breakage (cracking).

[0039] The above surface protective sheet 10 of the present invention is used as means for protecting the wafer surface and for temporarily fixing the wafer in a wafer back grinding process wherein a wafer of predetermined thickness having a surface furnished with semiconductor circuits and a back is provided, grooves of a cut depth smaller than the thickness of the wafer are formed from the wafer surface and the back of the wafer is ground so that the thickness of the wafer is reduced and that the wafer is finally divided into individual chips.

[0040] More specifically, the surface protective sheet 10 is used in a wafer back grinding process comprising the following steps.

[0041] First step: Grooves 4 of predetermined depth are formed by cutting from the surface of the wafer 3 along streets for partitioning a plurality of circuits (see Fig. 2).

[0042] Second step: The surface protective sheet 10 of the present invention is stuck so that all the surface of the wafer 3 is covered thereby (see Fig. 3).

[0043] Third step: The back of the wafer is ground so that the bottoms of the above grooves 4 are removed and that a desired thickness is realized to thereby accomplishing the division into individual chips 5 (see Fig. 4).

[0044] Thereafter, when the pressure sensitive adhesive layer 2 is composed of the energy radiation curable pressure sensitive adhesive, the pressure sensitive adhesive layer 2 is irradiated with energy radiation to thereby reduce the adhesive strength. A pressure sensitive adhesive tape (tape for mounting as described in Japanese Patent Laid-open Publication No. 5(1993)-335411) is stuck to ground surfaces of the chips, and the surface protective sheet 10 is peeled (see Fig. 5). The chips are picked up from the pressure sensitive adhesive tape and mounted on a given base.

[0045] When the pressure sensitive adhesive layer 2 is composed of a soft energy radiation curable pressure sensitive adhesive, the pressure sensitive adhesive layer 2 is irradiated with energy radiation from the substrate side in the above second step so that the elastic modulus of the pressure sensitive adhesive layer 2 can be controlled to fall within the above ranges. In this instance, further irradiation with energy radiation is not needed after the division into individual chips 5.

[0046] The above process enables easily producing thin IC chips with high yield.

EFFECT OF THE INVENTION

[0047] As apparent from the foregoing, the surface protective sheet of the present invention enables producing extremely thin IC chips with high yield.

EXAMPLE

[0048] The present invention will now be illustrated in greater detail with reference to the following Examples, which in no way limit the scope of the invention.

[0049] In the Examples and Comparative Examples, the elastic modulus, shear peel strength, compressive strain of sheet and crack occurrence ratio were measured by the following methods.

Elastic modulus

(1) elastic modulus G' (torsional shear method)

[0050]

test piece: cylinder of 8 mm diameter and 3 mm height,

measuring apparatus: DYNAMIC ANALYZER RDA II (manufactured by REOMETRIC SCIENTIFIC F.E. LTD.), and measuring frequency: 1 Hz.

[0051] When the elastic modulus was measured by the torsional shear method, the value G' was trebled to thereby convert the same to the value E'.

(2) elastic modulus E' (tension and compression method)

[0052]

test piece: 50 mm (length) x 4 mm (width) x 0.5 mm (thickness),
measuring apparatus: RHEOVIBRON DDV-II-EA (manufactured by Orientec Corporation), and
measuring frequency: 11 Hz.

Shear peel strength

[0053]

test piece: 15 mm (width) x 100 mm (length), and
measuring apparatus: INSTRON MODEL 4204 (manufactured by Instron corporation).

[0054] The above test piece was stuck to a specular wafer by means of a 1 kg roller so that the area at which the test piece and the wafer adhered to each other was 15 mm x 15 mm.

[0055] The test piece and the wafer were held by respective chucks, and measuring was made by peeling in the vertical direction (shear direction) at a head speed of 50 mm/min.

Compressive strain of sheet

[0056] The compressive strain was measured in the following manner according to Japanese Industrial Standard (JIS) K 7208.

[0057] A 5 mm thick sample was prepared by piling 10 mm x 10 mm sheets one upon another. Load was applied to the sample in the thickness direction at a measuring speed of 5 mm/min by means of INSTRON MODEL 4204 (manufactured by Instron Corporation) to thereby obtain a compressive load/deformation curve. The compressive strain at a compressive load of 40 kg/cm² was calculated from a curve value.

Crack occurrence ratio

[0058] A silicon wafer of 6 inch diameter and 700 μm thickness was stuck to dicing sheet (Adwill D-628 produced by Lintec Corporation), and grooves were formed by DAD 2H/6T (manufactured by Disco Corporation) using a 35 μm thick blade under conditions such that the cut depth was 400 μm and the chip size was 10 mm sq. Thereafter, the pressure sensitive adhesive sheet produced in each of the Examples and Comparative Examples was stuck to the grooved surface of the wafer. The dicing sheet was stripped off, and grinding was performed by means of DFG 840 (manufactured by Disco Corporation) until the wafer thickness became 80 μm. In Example 4, the pressure sensitive adhesive sheet was irradiated with energy radiation (ultraviolet rays) prior to the grinding step. In Examples 1 to 3 and the Comparative Examples, the pressure sensitive adhesive sheet was irradiated with energy radiation (ultraviolet rays) after the completion of the grinding step. In Example 5, irradiation of the pressure sensitive adhesive sheet with energy radiation (ultraviolet rays) was not performed. The pressure sensitive adhesive sheet was stripped off, and, among the divided chips, the number of cracked chips was counted. The crack occurrence ratio was calculated by the formula:

$$\text{crack occurrence ratio (\%)} = \frac{\text{No. of cracked chips}}{\text{Total no. of chips}} \times 100$$

Example 1

[0059] 100 parts by weight of a 25% ethyl acetate solution of an acrylic copolymer having a weight average molecular weight of 300,000, prepared from 60 parts by weight of butyl acrylate, 10 parts by weight of methyl methacrylate and 30 parts by weight of 2-hydroxyethyl acrylate, was reacted with 7.0 parts by weight of methacryloyloxyethyl isocyanate to thereby obtain an energy radiation curable copolymer. 0.5 part by weight of polyisocyanate compound (Coronate L produced by Nippon Polyurethane Industry Co., Ltd.) and 1.0 part by weight of photopolymerization initiator (Irgacure 184 produced by Ciba Specialty Chemicals K.K.) were mixed with 100 parts by weight, in terms of solid contents, of

the energy radiation curable copolymer, thereby obtaining an energy radiation curable pressure sensitive adhesive.

[0060] A 110 μm thick polyethylene film (Young's modulus \times thickness = 14.3 kg/cm) was coated with the energy radiation curable pressure sensitive adhesive so that the coating thickness after drying was 20 μm . Drying was performed at 100°C for 1 min, thereby obtaining a pressure sensitive adhesive sheet.

[0061] The aforementioned testing was performed using this pressure sensitive adhesive sheet. The results are given in Table 1.

Example 2

[0062] The same procedure as in Example 1 was repeated, except that the energy radiation curable copolymer was obtained by reacting 100 parts by weight of a 25% ethyl acetate solution of an acrylic copolymer having a weight average molecular weight of 300,000, prepared from 55 parts by weight of butyl acrylate, 10 parts by weight of methyl methacrylate, 5 parts by weight of methyl acrylate and 30 parts by weight of 2-hydroxyethyl acrylate, with 7.0 parts by weight of methacryloyloxyethyl isocyanate. The results are given in Table 1.

Example 3

[0063] The same procedure as in Example 1 was repeated, except that the energy radiation curable copolymer was obtained by reacting 100 parts by weight of a 25% ethyl acetate solution of an acrylic copolymer having a weight average molecular weight of 300,000, prepared from 50 parts by weight of butyl acrylate, 20 parts by weight of methyl methacrylate and 30 parts by weight of 2-hydroxyethyl acrylate, with 7.0 parts by weight of methacryloyloxyethyl isocyanate. The results are given in Table 1.

Example 4

[0064] 100 parts by weight of an acrylic copolymer having a weight average molecular weight of 300,000, prepared from 90 parts by weight of butyl acrylate and 10 parts by weight of 2-hydroxyethyl acrylate; 120 parts by weight of urethane acrylate oligomer having a weight average molecular weight of 7000 (trade name: SEIKABEAM PU-4, produced by Dainichiseika Color & Chemicals MFG. Co., Ltd.) as a component containing unsaturated groups not reactive with the above acrylic copolymer; 10 parts by weight of polyisocyanate compound (Coronate L produced by Nippon Polyurethane Industry Co., Ltd.); and 4.0 parts by weight of photopolymerization initiator (Irgacure 184 produced by Ciba Specialty Chemicals K.K.) were mixed together, thereby obtaining an energy radiation curable pressure sensitive adhesive. Using this pressure sensitive adhesive, a pressure sensitive adhesive sheet was produced in the same manner as in Example 1, except that the irradiation with energy radiation was performed prior to the grinding step.

[0065] The aforementioned testing was performed using this pressure sensitive adhesive sheet. The results are given in Table 1.

Example 5

[0066] The same procedure as in Example 1 was repeated, except that an acrylic removable pressure sensitive adhesive obtained by mixing 20 parts by weight of polyisocyanate compound (Coronate L) with 100 parts by weight, in terms of solid contents, of an acrylic copolymer having a weight average molecular weight of 500,000, prepared from 80 parts by weight of isobutyl acrylate, 15 parts by weight of methyl methacrylate and 5 parts by weight of 2-hydroxyethyl acrylate, was used in place of the energy radiation curable pressure sensitive adhesive of Example 1. The results are given in Table 1.

Comparative Example 1

[0067] The same procedure as in Example 1 was repeated, except that the energy radiation curable copolymer was obtained by reacting 100 parts by weight of a 25% ethyl acetate solution of an acrylic copolymer having a weight average molecular weight of 300,000, prepared from 80 parts by weight of 2-ethylhexyl acrylate and 20 parts by weight of 2-hydroxyethyl acrylate, with 4.7 parts by weight of methacryloyloxyethyl isocyanate. The results are given in Table 1.

Comparative Example 2

[0068] The same procedure as in Example 1 was repeated, except that the energy radiation curable copolymer was obtained by reacting 100 parts by weight of a 25% ethyl acetate solution of an acrylic copolymer having a weight average molecular weight of 300,000, prepared from 60 parts by weight of butyl acrylate, 10 parts by weight of methyl

methacrylate and 30 parts by weight of 2-hydroxyethyl acrylate, with 3.0 parts by weight of methacryloyloxyethyl isocyanate. The results are given in Table 1.

Comparative Example 3

[0069] Testing was performed using the pressure sensitive adhesive sheet of Example 4 which was not irradiated with energy radiation. The results are given in Table 1.

Table 1

	Elastic modulus of pressure sensitive adhesive (40°C) (Pa)	Shear peel strength (kg/cm ²)	Compressive strain (%)	Occurrence of crack (%)
Example 1	1.07x10 ⁵	10.8	4.4	0
Example 2	1.10x10 ⁵	12.8	4.1	0
Example 3	1.48x10 ⁵	13.5	3.6	0
Example 4	4.55x10 ⁸	33.7	3.2	0
Example 5	6.71x10 ⁶	11.5	3.5	0
Comp. Ex. 1	2.00x10 ⁴	7.9	6.2	7
Comp. Ex. 2	8.66x10 ⁴	9.6	5.5	0.2
Comp. Ex. 3	1.78x10 ⁴	6.5	7.2	9

Claims

1. A surface protective sheet for semiconductor wafer, used in wafer back grinding during a process comprising forming grooves on the surface of semiconductor wafer furnished with circuit so that the cutting depth of the grooves is smaller than the thickness of the wafer and grinding the back of the wafer so that the thickness of the wafer is reduced and that the wafer is finally divided into individual chips,
said surface protective sheet comprising a substrate and, superimposed thereon, a pressure sensitive adhesive layer having an elastic modulus of at least 1.0×10^5 Pa at 40°C.
2. The surface protective sheet as claimed in claim 1, wherein the pressure sensitive adhesive layer is composed of an energy radiation curable pressure sensitive adhesive.
3. The surface protective sheet as claimed in claim 1 or 2, wherein the pressure sensitive adhesive layer has a shear peel strength of at least 10 kg/cm².
4. The surface protective sheet as claimed in any of claims 1 to 3, which has a compressive strain of 0.1 to 5.0 % at 40 kg/cm².
5. A method of grinding a wafer back, comprising the steps of:
forming grooves on the surface of semiconductor wafer furnished with circuit so that the cutting depth of the grooves is smaller than the thickness of the wafer,
sticking to the wafer surface furnished with semiconductor circuits a surface protective sheet comprising a substrate and, superimposed thereon, a pressure sensitive adhesive layer having an elastic modulus of at least 1.0×10^5 Pa at 40°C, and
grinding the back of the wafer so that the thickness of the wafer is reduced and that the wafer is finally divided into individual chips.
6. The method as claimed in claim 5, wherein the pressure sensitive adhesive layer is composed of an energy radiation curable pressure sensitive adhesive, and, after the sticking of the surface protective sheet to the wafer surface furnished with semiconductor circuits, the pressure sensitive adhesive layer is irradiated with energy radiation so that the pressure sensitive adhesive layer has an elastic modulus of at least 1.0×10^5 Pa at 40°C.

7. The method as claimed in claim 6, wherein the pressure sensitive adhesive layer having been irradiated with energy radiation has a shear peel strength of at least 10 kg/cm².
8. The method as claimed in claim 6 or 7, wherein, after the irradiation with energy radiation, the surface protective sheet has a compressive strain of 0.1 to 5.0 % at 40 kg/cm².

5

10

15

20

25

30

35

40

45

50

55

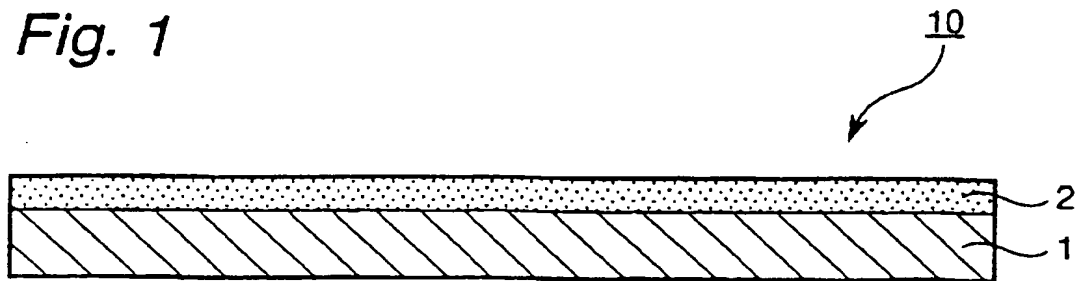
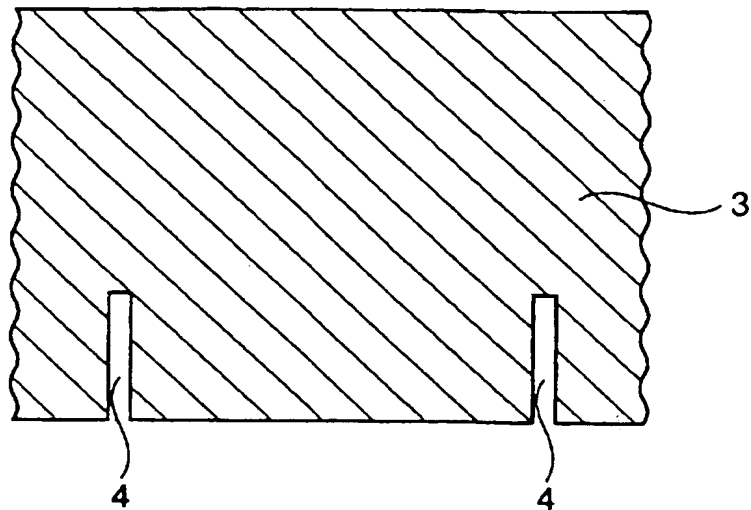
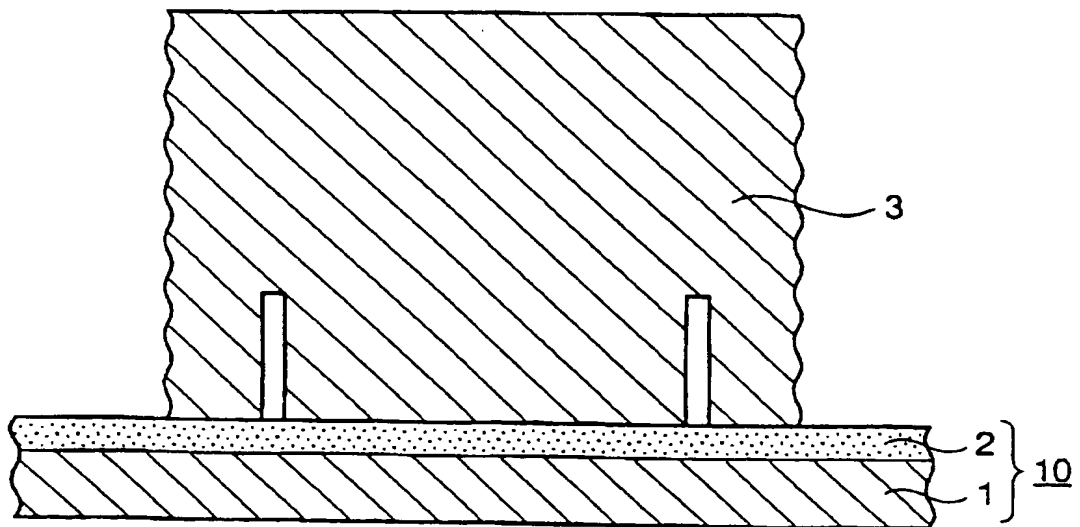
Fig. 1*Fig. 2**Fig. 3*

Fig. 4

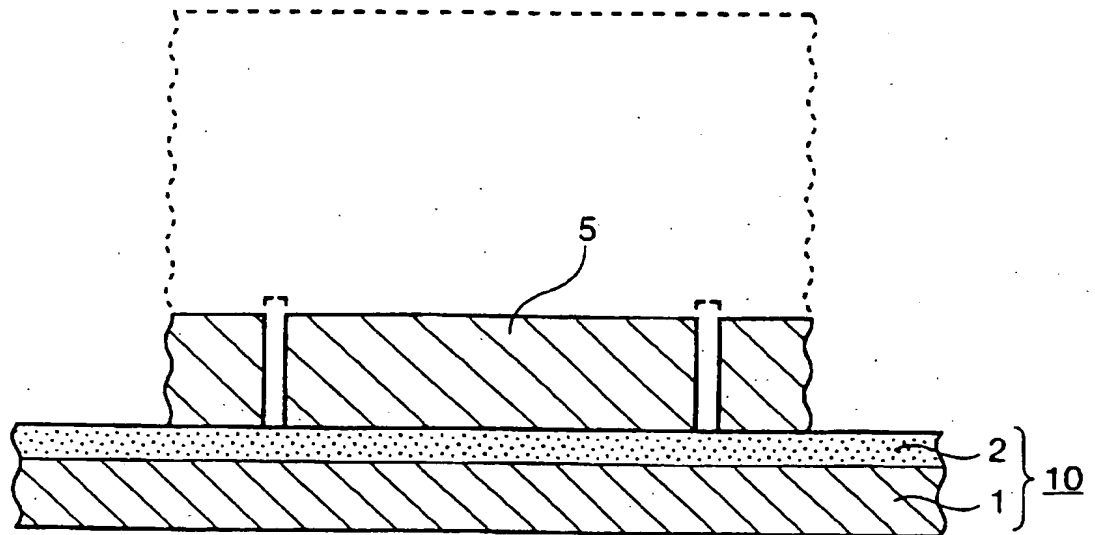


Fig. 5


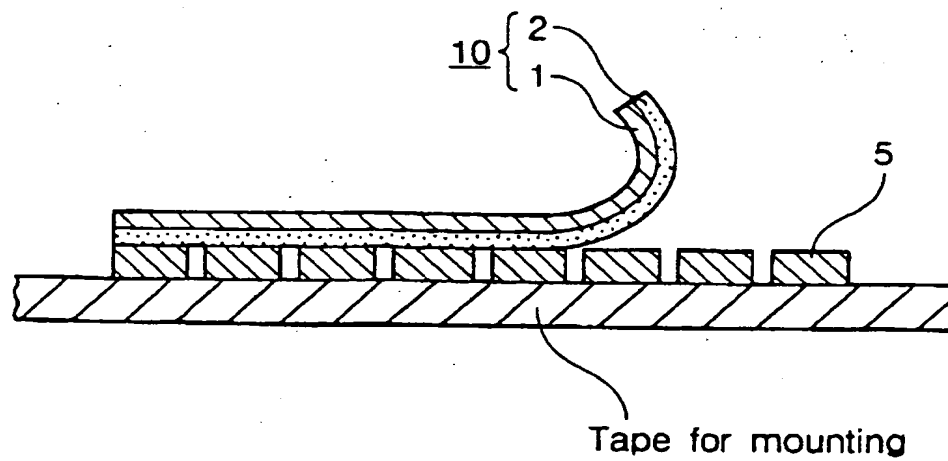


Fig. 6



(19)

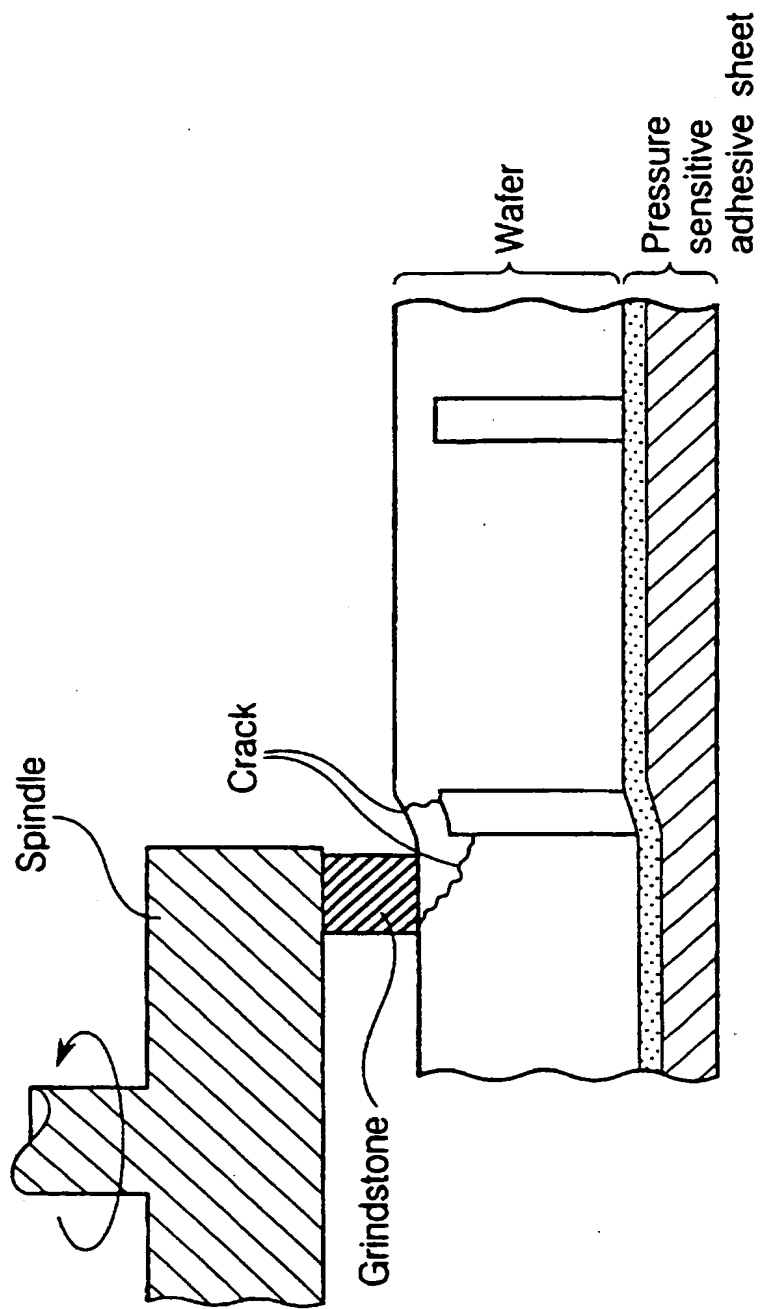

Europäisches Patentamt
European Patent Office
Office européen des brevets



(11)

EP 0 981 156 A3

(12)

EUROPEAN PATENT APPLICATION

(88) Date of publication A3:
09.01.2002 Bulletin 2002/02

(43) Date of publication A2:
23.02.2000 Bulletin 2000/08

(21) Application number: 99306494.8

(22) Date of filing: 17.08.1999

(51) Int Cl.7: **C09J 7/02**, H01L 21/302,
H01L 21/304, H01L 21/68,
H01L 23/29, H01L 21/784,
B24B 7/22, H01L 21/58

(84) Designated Contracting States:
**AT BE CH CY DE DK ES FI FR GB GR IE IT LI LU
MC NL PT SE**
Designated Extension States:
AL LT LV MK RO SI

(30) Priority: 18.08.1998 JP 23160298

(71) Applicants:
• Lintec Corporation
Tokyo 173-0001 (JP)
• KABUSHIKI KAISHA TOSHIBA
Kawasaki-shi, Kanagawa-ken 210-8572 (JP)

(72) Inventors:
• Takahashi, Kazuhiro
Kawaguchi-shi, Saitama 338-0866 (JP)
• Ebe, Kazuyoshi
Minamisaitama-gun, Saitama 349-0223 (JP)
• Takyu, Shinya
Kitakatsushika-gun, Saitama 345-0045 (JP)

(74) Representative: Towler, Philip Dean et al
Frank B. Dehn & Co., European Patent Attorneys,
179 Queen Victoria Street
London EC4V 4EL (GB)

(54) **Surface protective pressure-sensitive adhesive sheet for use in semiconductor wafer back grinding and method of use thereof**

(57) A surface protective sheet for semiconductor wafer, used in wafer back grinding during a process comprising forming grooves on the surface of semiconductor wafer furnished with circuit so that the cutting depth of the grooves be smaller than the thickness of the wafer and grinding the back of the wafer so that the thickness of the wafer is reduced and that the wafer is

finally divided into individual chips, the above surface protective sheet comprising a substrate and, superimposed thereon, a pressure sensitive adhesive layer having an elastic modulus of at least 1.0×10^5 Pa at 40°C. This surface protective sheet is applicable to a process which enables producing extremely thin IC chips with high yield.

EP 0 981 156 A3



European Patent
Office

EUROPEAN SEARCH REPORT

Application Number
EP 99 30 6494

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int.Cl.7)
X	GB 2 312 429 A (LINTEC CORP) 29 October 1997 (1997-10-29) * page 1, line 6 - line 22 * * page 6, line 9 - page 16, line 7 * * page 17, line 1 - line 18 * * page 19, line 20 - page 20, line 7 * * page 21, line 11 - page 23, line 20; table 1 *	1,2	C09J7/02 H01L21/302 H01L21/304 H01L21/68 H01L23/29 H01L21/784 B24B7/22 H01L21/58
Y	---	3-8	
Y	PATENT ABSTRACTS OF JAPAN vol. 017, no. 398 (E-1403), 26 July 1993 (1993-07-26) -& JP 05 074934 A (SONY CORP), 26 March 1993 (1993-03-26) * abstract * * paragraph '0005! * * paragraph '0007! - paragraph '0010! * * paragraph '0013! - paragraph '0015! *	3-8	
A	---	1,2	
X	WO 97 00534 A (MATSUMURA TAKESHI ;YAMAMOTO MASAYUKI (JP); YAMAMOTO TAKAYUKI (JP);) 3 January 1997 (1997-01-03) * the whole document *	1-3	TECHNICAL FIELDS SEARCHED (Int.Cl.7) B81C C09J H01L B23B B28D
A	---	4-8	
X	EP 0 157 508 A (NITTO ELECTRIC IND CO) 9 October 1985 (1985-10-09) * page 1, line 1 - page 2, line 7 * * page 3, line 23 - page 4, line 3 * * page 5, line 8 - page 9, line 12 * * page 11 * * page 12, line 20 - page 13, line 10 * * page 19 *	1,2	
A	---	3-8	
	---	-/--	
The present search report has been drawn up for all claims			
Place of search BERLIN		Date of completion of the search 14 November 2001	Examiner Klopfenstein, P
CATEGORY OF CITED DOCUMENTS		T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document	
X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document			

EP0 FORM 1503 03/82 (F04C01)



European Patent
Office

EUROPEAN SEARCH REPORT

Application Number
EP 99 30 6494

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int.Cl.7)
A	PATENT ABSTRACTS OF JAPAN vol. 004, no. 083 (E-015), 14 June 1980 (1980-06-14) -& JP 55 052235 A (TOSHIBA CORP), 16 April 1980 (1980-04-16) * abstract *	1-8	
E	EP 0 962 509 A (LINTEC CORP) 8 December 1999 (1999-12-08) * page 2, line 5 - line 25 * * page 2, line 43 - line 54 * * page 3, line 1 - line 28 * * page 4, line 50 - page 5, line 3; table 1 * * page 5, line 19 - line 49 *	1,2	
P,X	EP 0 926 732 A (NITTO DENKO CORP) 30 June 1999 (1999-06-30) * column 1, line 5 - line 26 * * column 2, line 28 - column 5, line 46 * * column 6, line 14 - line 58 * * column 7, line 52 - column 8, line 24 *	1,2	
P,A		3-8	
The present search report has been drawn up for all claims			TECHNICAL FIELDS SEARCHED (Int.Cl.7)
Place of search BERLIN		Date of completion of the search 14 November 2001	Examiner Klopfenstein, P
<p>CATEGORY OF CITED DOCUMENTS</p> <p>X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document</p> <p>T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document</p>			

EPO FORM 1503 03 82 (P04C01)

**ANNEX TO THE EUROPEAN SEARCH REPORT
ON EUROPEAN PATENT APPLICATION NO.**

EP 99 30 6494

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report. The members are as contained in the European Patent Office EDP file on
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

14-11-2001

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
GB 2312429	A	29-10-1997	JP 9291258 A	11-11-1997
			SG 60057 A1	22-02-1999
			US 5955512 A	21-09-1999
JP 05074934	A	26-03-1993	NONE	
WO 9700534	A	03-01-1997	JP 9007931 A	10-01-1997
			JP 9017724 A	17-01-1997
			JP 9034130 A	07-02-1997
			JP 2868720 B2	10-03-1999
			JP 9265191 A	07-10-1997
			WO 9700534 A1	03-01-1997
			US 6126772 A	03-10-2000
EP 0157508	A	09-10-1985	JP 1940230 C	09-06-1995
			JP 6016524 B	02-03-1994
			JP 60196956 A	05-10-1985
			DE 3586329 D1	20-08-1992
			DE 3586329 T2	10-12-1992
			EP 0157508 A2	09-10-1985
			US 5637395 A	10-06-1997
			US 5714029 A	03-02-1998
			US 6010782 A	04-01-2000
JP 55052235	A	16-04-1980	NONE	
EP 0962509	A	08-12-1999	JP 11343469 A	14-12-1999
			CN 1237607 A	08-12-1999
			EP 0962509 A2	08-12-1999
			SG 73646 A1	20-06-2000
EP 0926732	A	30-06-1999	EP 0926732 A2	30-06-1999
			JP 11288907 A	19-10-1999
			TW 430894 B	21-04-2001

EPO FORM P439

For more details about this annex : see Official Journal of the European Patent Office, No. 12/82